

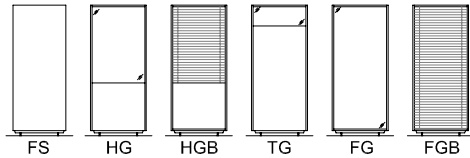
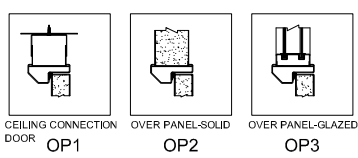
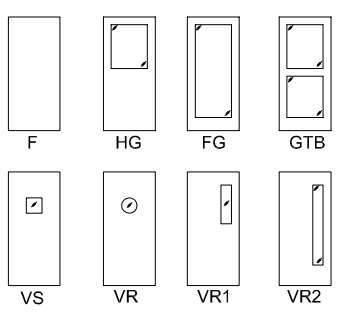
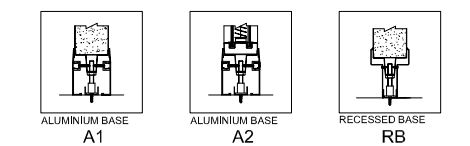
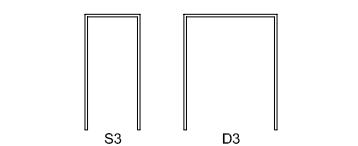


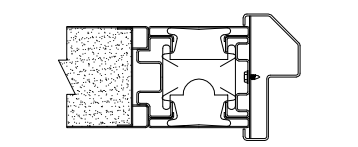
This data sheet details Thrislington Gulf material specification, options and dimensions.

80mm specification falls into two sections:

Section One: Deals with the formalities of tendering, preliminaries, contractual, statutory and product performance considerations.

Section Two: Deals with the physical properties and performance fields of the product.

Standard Options

Composite Panel Code	Solid	Glaze	Base	Panel connection	Corner connection	Door	Door overpanel	RAL colour	Hardware	Complete from following Codes	
Solid panel	Code <input type="text"/> : (see below)										
	Modular twin tray construction with welded assembly.										
Panel skin	1mm thick slip coated pre-galvanised steel to JIS G 3302 or equivalent										
Panel thickness	80mm.										
Panel core	Non Combustible mineral fibre infill or Honeycomb core.										
Glaze panel	Code <input type="text"/> : Full glaze		Code <input type="text"/> : Full glaze with blinds				Code <input type="text"/> : Top glaze				
	Code <input type="text"/> : Half glaze		Code <input type="text"/> : Half glaze with blinds								
Panel bases	Code <input type="text"/> : Aluminium		Code <input type="text"/> : Recessed								
Panel connection	Code <input type="text"/> : M/F		Code <input type="text"/> : Pilaster								
Corner connection	Code <input type="text"/> : Corner cover		Code <input type="text"/> : 90° corner panel								
Door overpanel	Code <input type="text"/> : Solid		Code <input type="text"/> : Glaze								
Solid Panel finish	Code <input type="text"/> PR : Polyester powder coating RAL										
Glaze Panel finish	Code <input type="text"/> PR : Polyester powder coating RAL										
Door Leaf	Code <input type="text"/> (see below)										
	Modular twin tray construction with lock formed / seam welded assembly. double door with or without astragal.										
Door Skin	1mm thick slip coated pre-galvanised steel to JIS G 3302 or equivalent										
Door Leaf Thickness	44mm.										
Door Core	Non Combustible mineral fibre infill or Honeycomb core.										
Frame	Code <input type="text"/> (see below)										
Door frame	1.5mm thick slip coated pre-galvanised steel to JIS G 3302 or equivalent.										
Frame assembly	Welded.										
Door frame and door finish	Code <input type="text"/> PR : Polyester powder coating RAL										
Vision panel options	Code <input type="text"/> : (see below)		Size <input type="text"/> : (see below)								
Hardware options	Code <input type="text"/> : (see below)										
Panel configuration				Door overpanel detail				Door leaf configurations			
 <p>Blinds optional at extra over costs</p>											
Panel bases				Frame configurations							
											
Panel connections		Corner connections		Standard Frame connection							
											
				Dimensional Range(all dimensions are in mm)							
Door panel Configurations		SIZES		Vision panel Configurations		SIZES					
S3		1010x2080		HG		630x600					
D3		2010x2080		FG		630x1750					
				Hardware options		GTB		630x790x2			
A		Personal entrance		VS		300x300					
B		Store or service		VR		300 dia					
C		Passage corridor		VR1		200x600					
				VR2		200x1740					
Various finishes are available at extra over costs											